


GZF3200K

Hybrid Belt-conveying UV Printer

Print on flexible and rigid substrates from one device

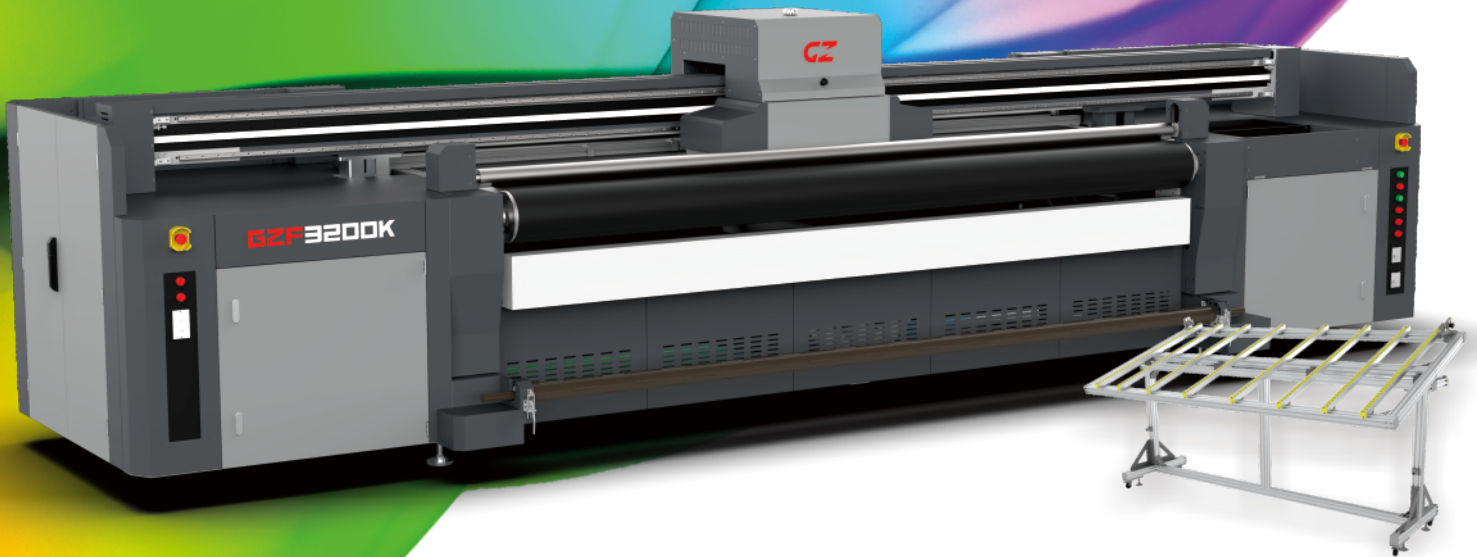

Available with extension table(optional)

Up to 16 Konica 1024i/1024a high-speed print heads.

LED UV lamps and anti-static system enable to print on a wide range of substrates.

Negative pressure system assures stable ink supply and nozzle jetting.

White ink circulation system prevents nozzle clogging and assures stable white performance.


Dual linear guides and 750W AC servo system assure quiet, stable and accurate carriage movement.

Magnetic linear motor and metal encoder assure high precision output in a quiet printing process(optional).

Tension adjustable belt system ensures precise media movement.

Water cooling platen offers wrinkle-free delivery for temperature sensitive materials.




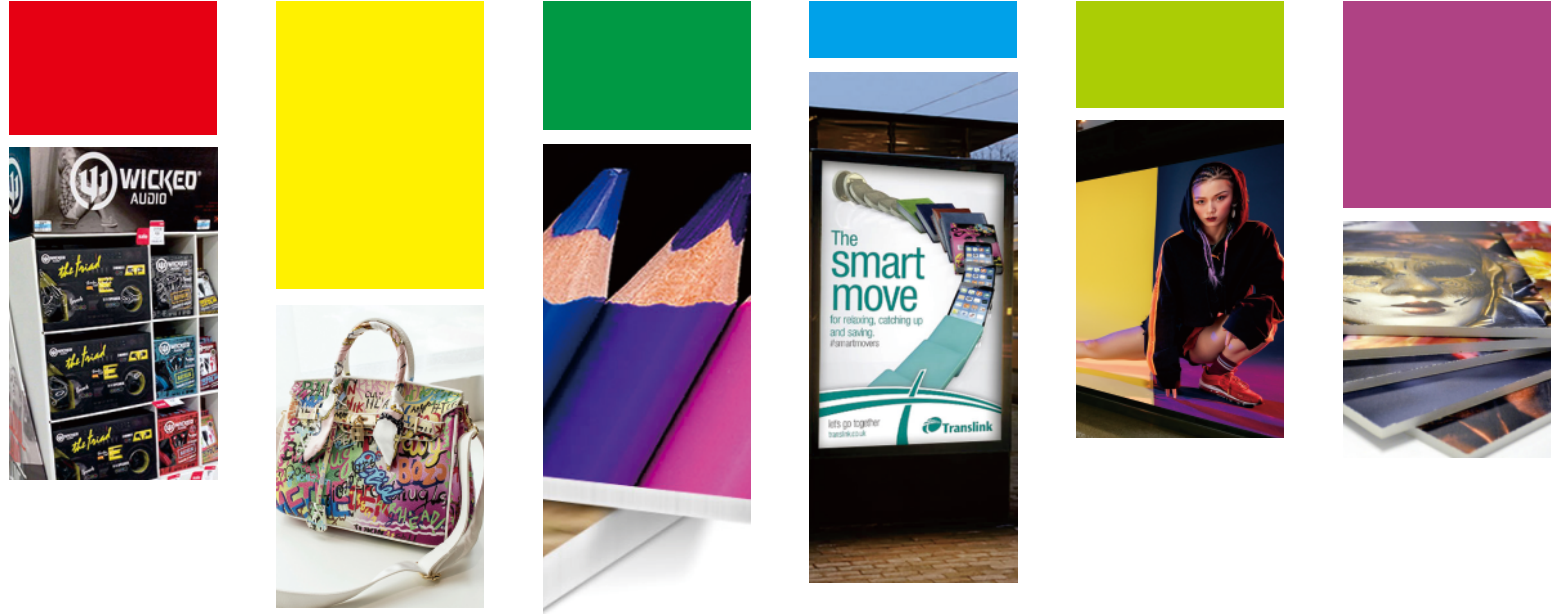


Model	GZF3200K									
Print Head	4~16 Konica 1024a print heads					4~16 Konica 1024i print heads				
Resolution	480x1080dpi~480x1440dpi					540x1080dpi~540x1440dpi				
Curing System	LED UV curing system									
Ink	UV curable ink									
Color Configuration	1XKCMY; 1XCMYK+1W; 2XKCMY; 2XCMYK+2W 3XKCMY; 3XCMYK+2W; 4XKCMY; 4XCMYK+2W									
Ink Supply System	Negative pressure system + White ink circulation system									
Ink Tank	4000ml									
Media Thickness	Max. 50mm									
Media Type	Flexible Media: Ceiling Film, Vinyl, Frontlit, Backlit, Banner, Fabric, Wall paper, Leather, etc. Rigid Media: PVC board, Foam board, Corrugated Paper, Aluminum sheet, Wood, etc									
Printing Width	Max. 3200mm									
Printing Speed	Print Mode	Resolution	2xKCMY	4xKCMY	CWC	Resolution	2xKCMY	4xKCMY	CWC	
	Draft	480*1080	63m ² /h	125m ² /h	30m ² /h	540*1080	66m ² /h	130m ² /h	32m ² /h	
	Production Quality	480*1440	51m ² /h	100m ² /h	25m ² /h	540*1440	58m ² /h	105m ² /h	27m ² /h	
	Hi-Precision	480*1080	38m ² /h	75m ² /h	18m ² /h	540*1080	41m ² /h	80m ² /h	20m ² /h	
		480*1440	28m ² /h	55m ² /h	13m ² /h	540*1440	32m ² /h	60m ² /h	15m ² /h	
Data Interface	External: USB3.0; Internal: Fiber Optical									
Working Environment	Temp. 20°C~28°C, Humidity: 40%~70%									
Software	FlexiPRINT UV version+GZ control console									
Power	Single-phase, 50/60Hz, AC220±10%; 31A(Printer+Vaccum); 13.8A(UV controller)									
Installed/Packed Size	LxWxH(mm): 6340x2000x1760/6450x2100x1950(Printer); 1230x810x720(Vaccum blower+UV controller)									
N.W./G.W.	2100kgs/3200kgs(Printer)									

*Specifications are liable to change without prior notice.


Main Features




Konica 1024i/1024a print heads



Negative Pressure System



Media alignment bar



Precise belt system



750w AC Servo Motor



LED UV lamps & Static eliminator

Gongzheng Group Co., Ltd.

Add: Miaobei Village, Yongjia County, Wenzhou City, Zhejiang Province, China 325102
 Tel: +86-577-67319778
 Fax: +86-577-67319775
 Email: gzsales@gongzheng.com
 Web: www.gongzheng.com



Authorized distributor:

